

- KEY
- Cone
 - Sign
 - Work area
 - Traffic light head
 - Traffic light phase
 - Diversion route

DETAIL B

Single/Dual carriageway 40mph or less - 450mm traffic cones, spacing 1.5m.
Single/Dual carriageway 50mph or more - 750mm traffic cones, spacing 1.5m.
Dual carriageway national speed limit - 750mm traffic cones, spacing 1.5m, relaxation 3m.

Notes:

- During darkness, warning lights to BS EN 12352:2006 should be provided in accordance with Table A1.3 (Appendix 1).
- 45 degree tapers have 1.5m spacing and no relaxations.
- On motorways and NSL AP duals with hard shoulders, 1m cones will be required for both standard and relaxation works for lead tapers and the facing wall of lane changes.

DETAIL C2

Single carriageway 40mph or less - 450mm traffic cones.
Single/Dual carriageway 50mph or more - 750mm traffic cones.

Notes:

- During darkness, warning lights to BS EN 12352:2006 should be provided in accordance with Table A1.3.

Min width of sideways safety zone (S)	0.5 m
Min length of longways clearance (L)	0.5 m
Speed of the road	30

Rev	Description	By	Chk	Date
Revisions				

Client:

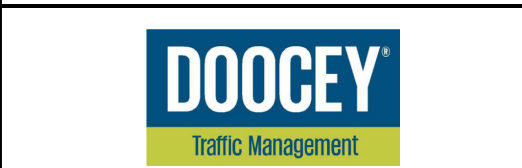
nationalgrid

Project:



Southgate,
Cradley Heath, B64 6AH
Grid Ref: (x)394559 ; (y)285763

Title:

Road Closure And Diversion &
Temporary Two Way
Traffic Lights



Design: JJO	Drawn: JJO	Chkd: OP
Date: 02/09/25	Date: 02/09/25	Date: 02/09/25
Scale: A3 - NTS	Status: Proposed	
Drawing No	DTM7645 - 003	
		Rev: -

Traffic Light Phase Timings			
Phase 1: Graingers Lane, (S)	Red	10s	
	Green	35s	
Phase 2: Graingers Lane, (N)	Red	10s	
	Green	35s	
Note: Timings may only be adjusted by a competent operative to suit traffic conditions if required			