


NOTE
minimum of 1.2m to be maintained for pedestrians.

NOTE
Pedestrians to be managed on site.

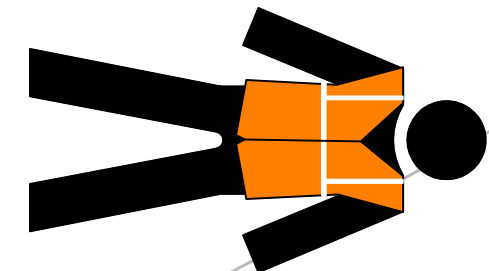

- KEY**
- Cone
 - Sign
 - Work area
 - Traffic light head
 - Traffic light phase

DETAIL B

Single/Dual carriageway 40mph or less - 450mm traffic cones, spacing 1.5m.
Single/Dual carriageway 50mph or more - 750mm traffic cones, spacing 1.5m.
Dual carriageway national speed limit - 750mm traffic cones, spacing 1.5m, relaxation 3m.

Notes:

1) During darkness, warning lights to BS EN 12352:2006 should be provided in accordance with Table A1.3 (Appendix 1).
2) 45 degree tapers have 1.5m spacing and no relaxations.
3) On motorways and NSL AP duals with hard shoulders, 1m cones will be required for both standard and relaxation works for lead tapers and the facing wall of lane changes.

DETAIL C2

Single carriageway 40mph or less - 450mm traffic cones.
Single/Dual carriageway 50mph or more - 750mm traffic cones.

Notes:

1) During darkness, warning lights to BS EN 12352:2006 should be provided in accordance with Table A1.3.

Min width of sideways safety zone (S)	0.5 m			
Min length of longways clearance (L)	15 m			
Speed of the road				
Revisions				
Rev	Description	By	Chk	Date



Project:
98 High St, West Bromwich B70 6JW

Title:
PEDESTRIAN MANAGEMENT



Design:	DTM	Drawn:	LC	Chkd:	PB
Date:	07/03/25	Date:	07/03/25	Date:	07/03/25
Scale:	A3 - NTS	Status:	Proposed		
Drawing No	DTM/LC	Rev:	1		